Dimensions:
42"W x 22"D x 76"H

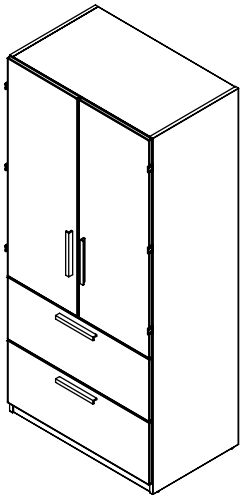

Part Number:
EXWAZZ0993-LA8

Materials:

Exterior Sides
Side panels shall consist of 7-ply, ¾" thick Red Oak or Maple face and back hardwood veneer core plywood, with PVC edge band

Back
Back panel shall consist of 7-ply, ¾" thick Red Oak or Maple face and back hardwood veneer core plywood, with PVC edge band.

Bottom
Bottom shall consist of 7-ply, ¾" thick Red Oak or Maple face and back hardwood veneer core plywood, with PVC edge band.

Top
Top shall consist of 7-ply, ¾" thick Red Oak or Maple face and back hardwood veneer core plywood, with PVC edge band.

Doors
Doors are ¾" Red Oak or Maple face and back on engineered wood core plywood, with PVC edge band. Each door has 3 hinges with a 270 degree range of operation. The pulls on the doors are aluminum pulls.

Drawer Fronts
Drawer fronts are ¾" engineered wood core with 1 mil PVC edge.

Drawers
Drawer Box front panel (1), drawer box back panel (1), drawer box side panels (2) shall consist of rotary cut, maple veneer face and back, 5-ply, ½" thick, veneer core, hardwood plywood with PVC edge banding. Drawer bottom shall consist of poly vinyl coated ¼" hardboard fit into a routed groove located in the drawer panels and secured using hot melt glue and 18 gauge pin nails. Drawer bottoms wider than 20" are supported midway underneath with a solid wood spanner support. Drawer box shall be assembled using dovetail or dowel joinery and adhesive. Adhesive shall be a fast setting, ambient cure, water based wood glue.

Drawer Slides
Drawer assembly suspension system shall be ¾ extension, self closing drawer runners (2/drawer).

A coat hook is mounted on the wardrobe door.
A metal coat rod is mounted in the interior of the wardrobe.

Construction:
Glue and Dowel construction throughout.

Finish
Panel surfaces shall be finished on the inside and outside using an ultraviolet cured finish of 100% solid epoxy acrylate, at .3 mil (dry) thick, that emits no volatile organic compounds and contains no formaldehyde.

©2013